

Conductors-Overhead

Cable Description: ACSR DOG OVERHEAD CONDUCTOR : WAPDA P-50:88 : : STRANDING

Design and Construction Data

Reference Manufacturing Standard		WAPDA P-50:88
Max. Permissible Continuous Conductor Temperature	°C	50
Max. Conductor Temperatuer	°C	80
Type of Conductor		ACSR DOG
Area of complete conductor	mm ²	118.53
Conductor Material & Shape		Steel & Aluminum - Stranded Class 2
No. of wires of Steel		7
Diameter of Steel wires	mm	1.57
Minimum Tensile strength of Steel wires Before stranding	Kg/mm ²	133.6
Minimum Tensile strength of Steel wires After stranding	Kg/mm ²	126.9
Min. Tensile strength of steel wires at 1 % Extension	Kg/mm ²	119.5
Minimum Elongation of Steel wire After stranding	%	3.5
Wrapping test of Steel wires		No Cracks
Minimum Mass of zinc coating	g/m ²	198
Adherence Test of zinc coating		Should be adherent
Lay Ratio of Steel core layer	Time	13~28
Lay direction of Steel core layer		Left Hand
Steel cross section Area	mm ²	13.55
Approximate Steel core weight	Kg/Km	106.76
Max. Resistivity of Aluminum wire at 20 °C	Ωmm ² /m	0.028264
No. of wires of Aluminum	No	6
Diameter of Aluminum wires	mm	4.72
Minimum Tensile strength of Aluminum After stranding	Kg/mm ²	15.40
Wrapping test of Aluminum wires		No Cracks
Lay Ratio of Outer most Aluminum layer	Time	10~14
Lay direction of Outer most layer		Right Hand
Aluminum cross section Area	mm ²	104.98
Approximate Aluminum weight	Kg/Km	289.45
Density of Aluminum at 20 °C	g/cm ³	2.703
Constant mass Temperature coefficient	/ °C	0.00403
Conductor Diameter	mm	10.05
Ultimate Tensile Strength of Complete Conductor	Kg	3225
Total conductor weight	Kg/Km	394
Nominal Drum Length	MTR	1600
Nominal copper equivalent	mm ²	64.04


Electrical Data

Max Conductor DC resistance @ 20 °C	ohm/km	0.273
Current carrying Capacity @ 50 °C	Amp	275
Wind speed (v)	m/s	0.6
Solar radiation (Si)	W/m ²	1200
Emmisivity (Ke)		0.5
Solar radiation absorption coefficient (Y)		0.5
The Conductor shall meet all Test requirements		WAPDA P-50:88

Conductors-Overhead

Cable Description: ACSR DOG OVERHEAD CONDUCTOR : WAPDA P-50:88 : : STRANDING

Cable Drawing

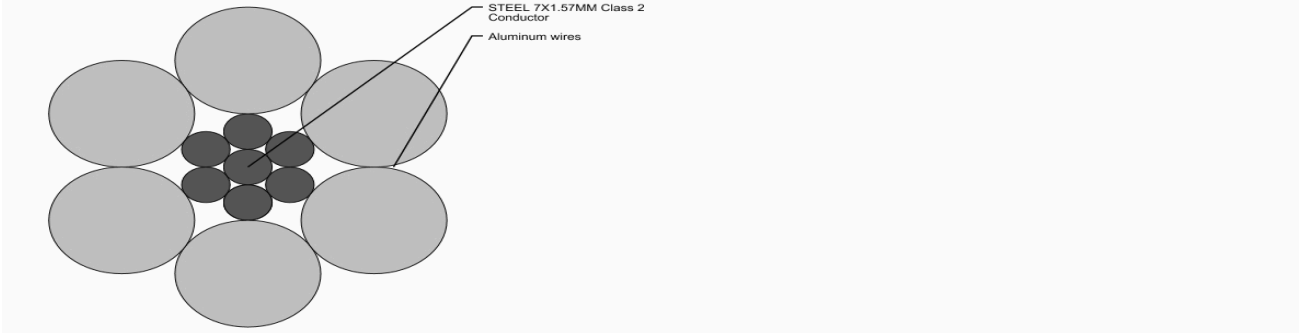

ACSR DOG OVERHEAD CONDUCTOR : WAPDA P-50:88 : : Stranding		Approx. Diameter
Layer 1: No. of Wires / Steel Size	1/1.57mm	mm
Layer 2: No. of Wires / Steel Size	6/1.57mm	mm
Layer 3: No. of Wires / Aluminum Size	6/4.72mm	mm